

4110 Reader, and 4110-A Dual I/O Series Command Module

D.I.P. SWITCH SETTINGS

1. Module Address

Use the table below to determine code settings. A black square means the switch should be in the "ON" position. To set Module code 01 for example, only Switch 7 would be "ON".


2. On-Line/Off-Line Mode Settings

When D.I.P. Switch 9 is OFF, only the "PC" can make access decisions. When D.I.P. Switch 9 "ON", the "PC" makes the access decisions if it is On-Line. If not, the Module will make the decision.




NOTE TO INSTALLER

The supplied 220 OHM resistor should be placed at the last module, or the module farthest from the "PC". Place the resistor across terminals 26 and 27.

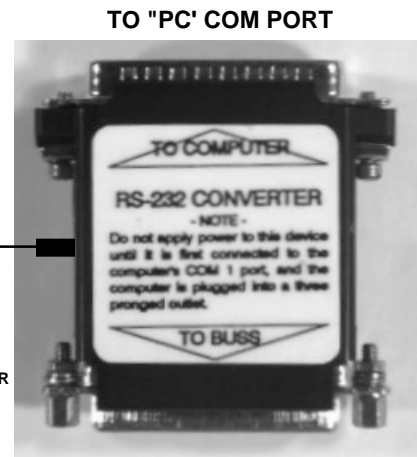

12 VDC
100 MA
TRANSFORMER

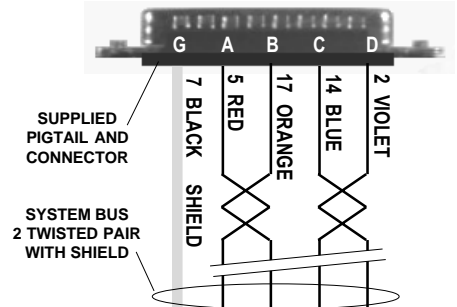

24 VOLTS AC OR DC
ISOLATED FROM EARTH GROUND

