Proximity Readers

Models:

4100-VAL, 4100-SP1, 4100-SP2, 4100-SLIM, 4100-WS, 4100-MP

General

These are standard indoor/outdoor proximity readers. They are suitable for most environments.

They may be mounted directly to a single gang electrical junction box or any flat surface.

Command Module

Readers may be mounted up to 50 feet from the Command Module provided that the 5 volt power conductors are #18 or larger.
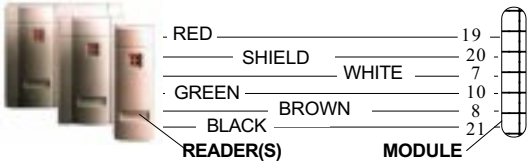
READER TO MODULE WIRING